

**okuma**  
INSPIRED FISHING

***SALINA***

**Saltwater  
Spinning Reel**







# *SALINA*

## **PERFORMANCE BY LIGHTWEIGHT**

---

Specifically designed for saltwater use, the Salina spinning reels feature Okuma's rigid LITECAST construction design, Dual Force Drag System for extreme stopping power and our proprietary High Density Gearing with a special corrosion resistant coating. Combine this with a high-speed gear ratio and a customized aluminum handle and you have one of the best saltwater fishing reels on the market.





- Rigid and corrosion resistant LITECAST construction
- Carbonite high output Dual Force Drag (DFD) System with Cal's drag grease
- Multi-disc drag adjustment for more precise settings
- Even Flow Roller System with DLC coating
- Gear stabilization design
- 6HPB + 1RB corrosion resistant stainless-steel bearings
- CRC: Corrosion resistant coating process
- Dual anti-reverse: Quick-Set and ratchet system
- HDGII: Corrosion resistant, High density gearing II
- Precision machine cut brass pinion gear
- Manual bail trip function for ultimate reliability
- Machined aluminum, 2-tone anodized spool
- Machined aluminum, screw-in handle
- Machined aluminum, 2-tone anodized round knob



## MAG-ALLOY CONSTRUCTION DESIGN



Okuma's LITECAST construction design is 15% lighter than former Azores reels while maintaining maximum strength and durability.

## CARBONITE HIGH OUTPUT DUAL FORCE DRAG (DFD) SYSTEM


DFD incorporates both surfaces of the spool to maximize high-end drag pressure, efficiency and overall smoothness. Mounted in the top of the spool and protected by the Hydro Block system is a multi-disc carbon drag system that works in conjunction with a secondary drag system that is mounted under the spool. Even pressure is applied to both surfaces of the spool for maximum stability and significantly increased drag output compared to traditional single drag systems.



## DIAMOND-LIKE CARBON (DLC)

### EVEN FLOW ROLLER SYSTEM WITH DLC COATING

The EFR II with DLC coating greatly reduces line friction allowing the fishing line to run more smoothly over this smooth surface, prolonging the life of the fishing line and the prevention of line twist.

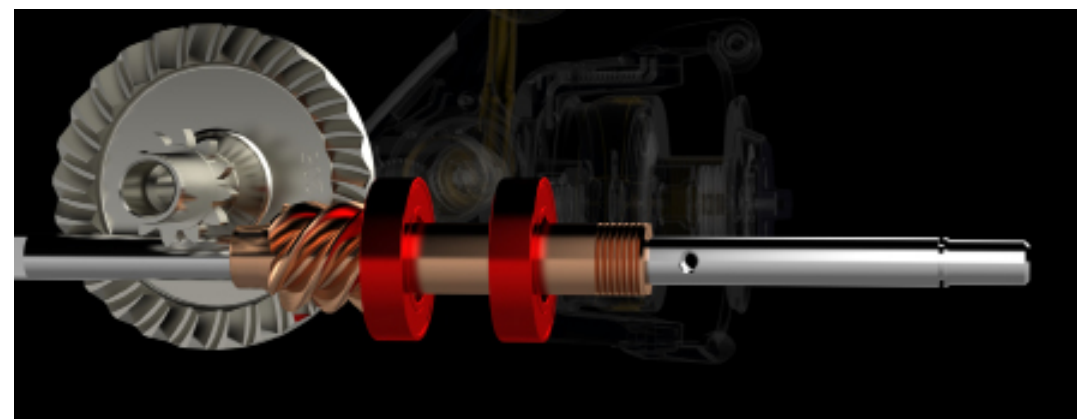

## GEARING STABILIZATION DESIGN

Ultimate pinion stability for perfect main gear adjustment: super smooth gearing feeling and high durability.



## HIGH PERFORMANCE BEARING (HPB)

6 high performance ball bearings provide the Salina reels with outstanding smoothness and reliability in saltwater fishing environments. The balls used on the HPB's are constructed from the same high-grade stainless-steel material as the bearing housing.



# SALINA



Model	Gear Ratio	Bearing	Weight (oz)	Line Retrieve (in)	Max Drag Pressure (lbs)	Monofilament Line Capacity (lbs/yds)	Frame	Sideplate	Rotor	Spool
SA-4000HA	5.8:1	6HPB+1RB	14.2	35.4	33	8/280, 10/230, 12/190	LC	LC	LC	AL
SA-5000HA	5.8:1	6HPB+1RB	14.9	37.4	33	10/295, 12/245, 14/210	LC	LC	LC	AL
SA-6000HA	5.8:1	6HPB+1RB	15.2	39.8	33	12/320, 16/215, 20/175	LC	LC	LC	AL
SA-8000A	5.4:1	6HPB+1RB	22.9	40.6	44	12/440, 16/300, 20/245	LC	LC	LC	AL
SA-10000A	5.4:1	6HPB+1RB	23.5	44.1	44	12/550, 16/375, 20/305	LC	LC	LC	AL
SA-14000A	5.4:1	6HPB+1RB	23.5	45.7	44	12/710, 16/480, 20/395	LC	LC	LC	AL

\*H: High gear ratio \*A: Generation



# SALINA



Model	Gear Ratio	Bearing	Weight (g)	Line Retrieve (cm)	Max Drag Pressure (kg)	Monofilament Line Capacity	Frame	Sideplate	Rotor	Spool
SA-4000HA	5.8:1	6HPB+1RB	405	90	15	(mm/M) 0.25/280, 0.30/185, 0.35/130 (kg/M) 3.6/260, 4.5/210, 5.4/170 (PE no/M) 1/470, 1.5/320, 2/235	LC	LC	LC	AL
SA-5000HA	5.8:1	6HPB+1RB	422	95	15	(mm/M) 0.30/240, 0.35/170, 0.40/125 (kg/M) 4.5/270, 5.4/225, 6.3/195 (PE no/M) 1.5/415, 2/305, 3/210	LC	LC	LC	AL
SA-6000HA	5.8:1	6HPB+1RB	428	101	15	(mm/M) 0.30/315, 0.35/220, 0.40/165 (kg/M) 5.4/290, 7.3/200, 9.1/160 (PE no/M) 2/395, 3/270, 4/215	LC	LC	LC	AL
SA-8000A	5.4:1	6HPB+1RB	650	103	20	(mm/M) 0.40/230, 0.45/180, 0.50/140 (kg/M) 5.4/405, 7.3/275, 9.1/225 (PE no/M) 3/380, 4/300, 5/240	LC	LC	LC	AL
SA-10000A	5.4:1	6HPB+1RB	666	112	20	(mm/M) 0.40/290, 0.45/220, 0.50/175 (kg/M) 5.4/500, 7.3/340, 9.1/280 (PE no/M) 4/375, 5/305, 6/230	LC	LC	LC	AL
SA-14000A	5.4:1	6HPB+1RB	668	116	20	(mm/M) 0.40/370, 0.45/290, 0.50/230 (kg/M) 5.4/650, 7.3/440, 9.1/360 (no/M) 6/295, 8/210, 10/160	LC	LC	LC	AL

\*H: High gear ratio \*A: Generation





[www.okumafishing.com](http://www.okumafishing.com)